


eSATA PCI Express Card plus IDE

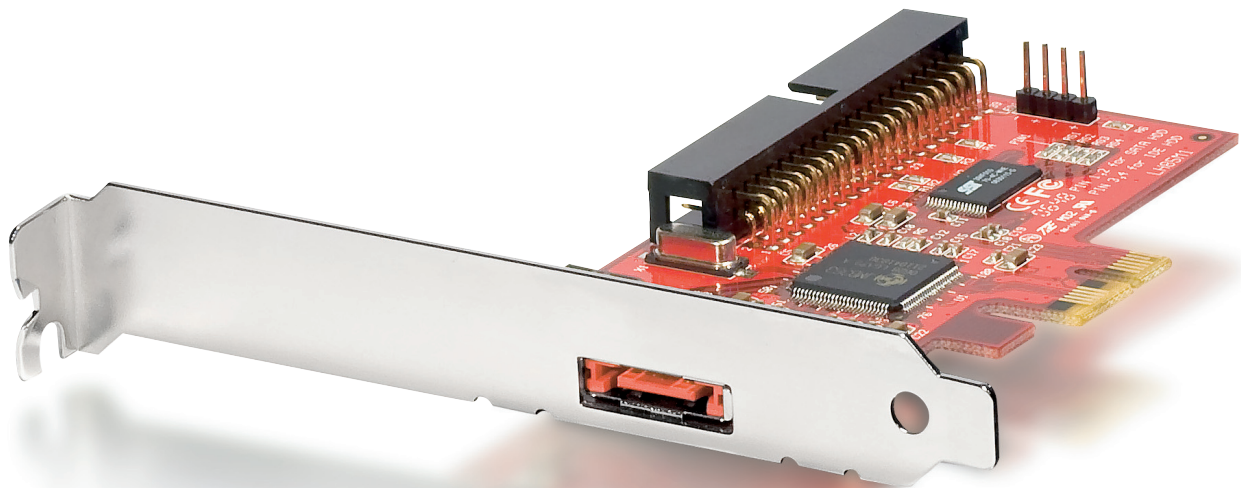

Specifications

- ▶ Compliant with PCI Express specification
- ▶ Compliant with Serial ATA 1.0a and Serial ATA II
- ▶ Supports SATA II data transfer rates up to 3 Gbps
- ▶ Supports PCI Express data transfer rates up to 2.5 Gbps
- ▶ Supports Native Command Queuing (NCQ)
- ▶ Supports a slave SMBus interface
- ▶ Supports two independent SATA II channels (separate logic and FIFO)
- ▶ Supports up to UDMA6 mode of PATA
- ▶ Integrated PLL for both PCI Express bus and SATA II interface
- ▶ Supports WIN 2000, WIN XP, WIN Vista and Linux
- ▶ 1x eSATA II port
- ▶ 1x internal SATA port
- ▶ 1x PATA (IDE) port
- ▶ 1x 4pin LED connector
- ▶ Dimensions (PCB): 58 x 103 mm
- ▶ Weight: 0.048 kg

Package Contents

- ▶ 1x eSATA PCI Express Card plus IDE
- ▶ 1x CD with Driver and User Manual
- ▶ 1x Low Profile Slot Bracket

