



Item-No.: 111826  
 ROHS-Compliant

LTR	REV.	DESCRIPTION	DATE

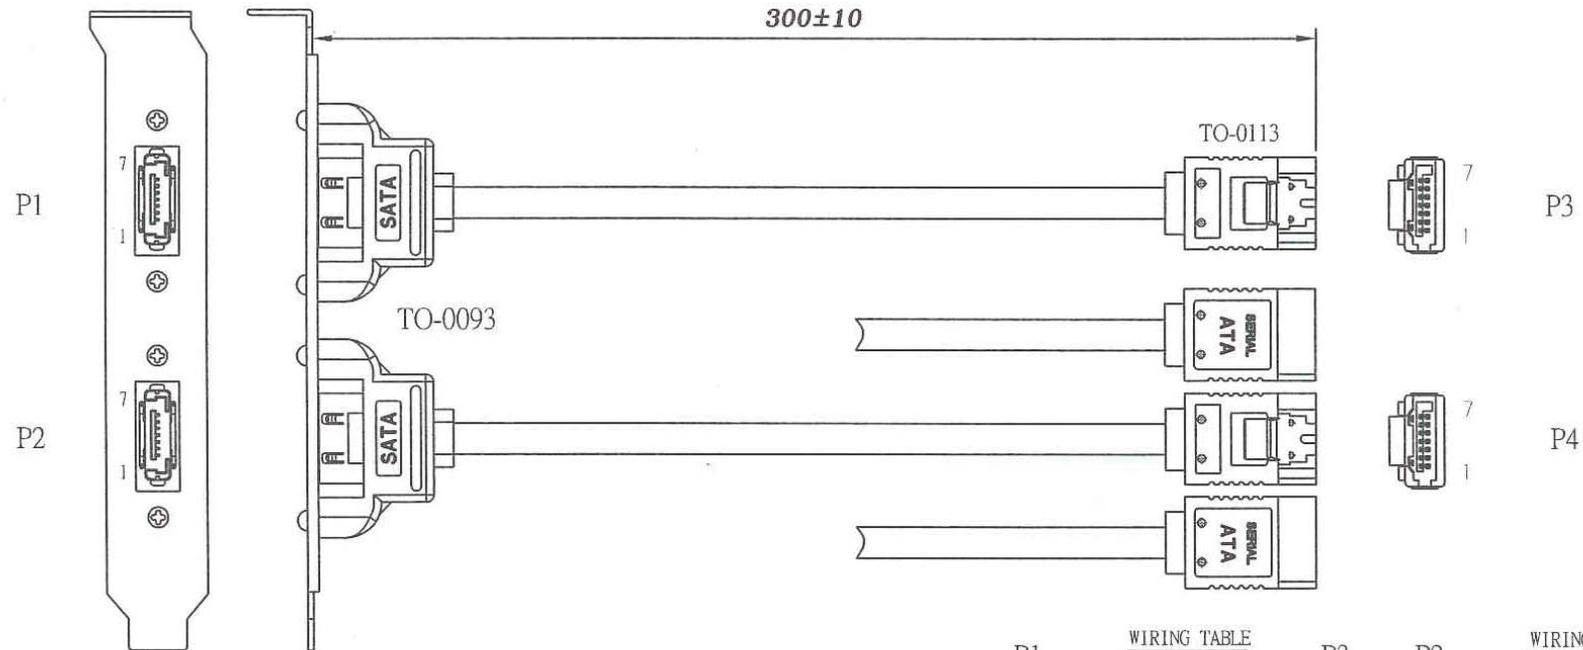

**NOTE:**

- CABLE:**  
 UL2725 80°C 30V [26AWG(1/0.404)\*2F  
 +AL/MY+DRAIN WIRE(1/0.32)\*2]TIN  
 INS: FOAM-PE OD:  $\phi 1.1 \pm 0.05$ mm  
 PVC JACKET OD:  $\phi(2.2 \pm 0.1) * (7.8 \pm 0.2)$ mm COLOR: RED (PANTONE 200C)  
 IMPEDANCE:  $100 \pm 5$  OHM
- CONNECTOR:**  
 P1 & P2: SATA II 7P RIVETING TYPE PBT BLACK G/F W/METAL SHELL  
 P3 & P4: SATA 7P CRIMP TYPE GOLD FLASH CONTACT,  
 W/METAL LATCH
- HOOD: MOLDED TYPE, PVC 45P, COLOR: BLACK(NK-K01)**
- CABLE ASS'Y ELECTRICAL TEST:**  
 4-1 100% OPEN SHORT & MIS WIRE TEST  
 4-2 CONTACT RESISTANCE 3 OHM MAX  
 4-3 INSULATION RESISTANCE 10M OHM MIN  
 4-4 HI-POT DC300V/0.01SEC.

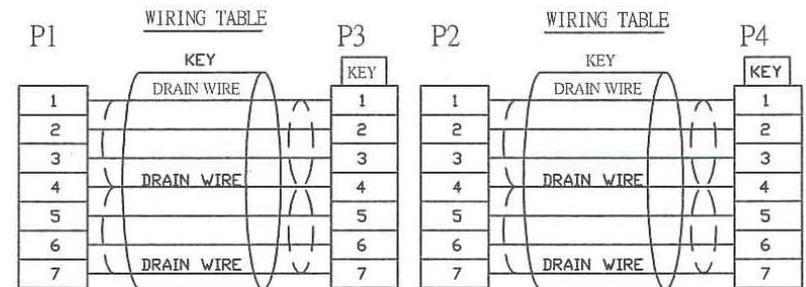

Tolerance	Inch	M/M
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05

Draw  
 FANNIE 09/23/08'

Check  
 Engr



eSATA adaptercable, 0,30m  
 2-port with slotbracket

App'd	Third Angle Projection		
Scale	NONE	Units	m/m
Dwg No.	140-1612	REF:I	Sheet 1/1