


## Firewire 800/400 COMBO PCI Card

---

The equip IEEE 1394a/b Combo PCI Card with 3 external ports (2x IEEE 1394b, 1x IEEE 1394a) supports data transfer rates of 100/200/400/800Mbps, hot swapping, plug & play and offers over-current protection per port. Plus extra on board power connector.

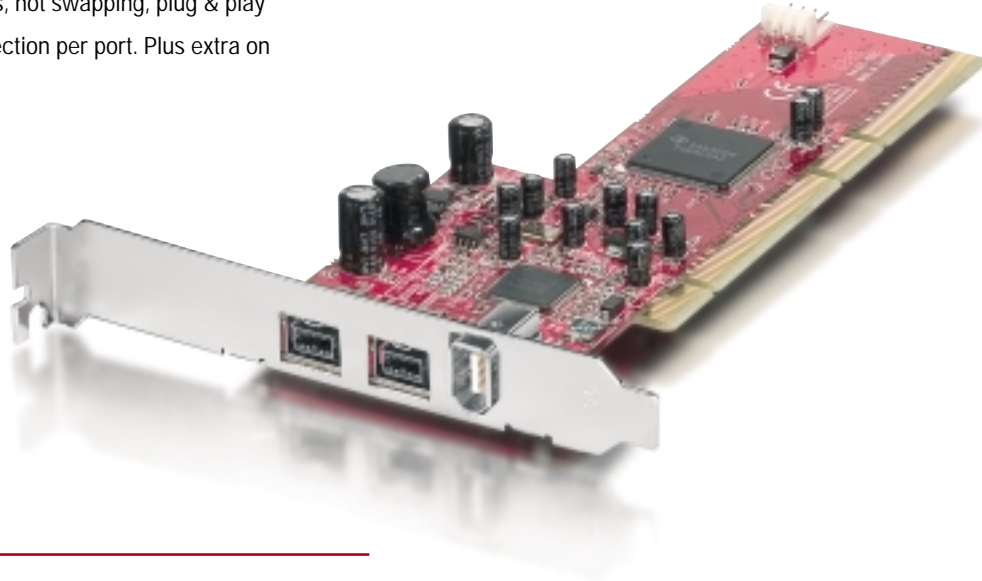

### Specifications

---

- 64bit/33MHz and 32bit/33MHz fully compliant PCI host interface
- Compliant with PCI specification, rev.2.2
- Integrated PCI DMA engine
- Supports 5V and 3.3V
- On board power connector (4pin) for extra power input to supply power up to 1.5amps per port
- Dimensions (PCI card): 163 x 65 x 16mm
- Weight (PCI card): 0.067kg
- Compliant with IEEE 1394b rev. 1.33+
- Compliant with IEEE 1394a-2000 and IEEE 1394-1995 standard
- Supports data transfer rates of 100/200/400/800 Mbps
- Supports Plug & Play
- 2x external IEEE 1394b ports 9pin (bilingual) up to 800Mbps, backward compatible
- 1x external IEEE 1394a port 6pin, up to 400Mbps
- Built-in 800Mbps driver support for Mac OS 10.2.4 or newer
- Built-in 400Mbps driver support for Windows OS and Mac OS 8.6 - 10.2.3
- Dimensions ( packing box): 220 x 156 x 45mm
- Overall weight: 0.197kg

### Package contents

---

- 1x FireWire800/400 Combo PCI Card
- 1x Y-type Power Cable
- 1x User Manuel

