



## ST/ST Fiber Optic Patch Cable, OM3

The equip®Fiber Optic Adapter Cable is made of superior materials to ensure an insertion loss, return loss, and endface geometry connection. The Fiber Optic Patch Cord series comes with a comprehensive collection of lengths and connectors to fulfill your demand for the deployment.

### | Specification

<b>Fiber mode</b>	Multi Mode
<b>Type</b>	ST/ST
<b>Core Diameter</b>	50/125 µm

### | Ordering Information

Length (meter)	PN
1	25224107
2	25224207
3	25224307
5	25224507
10	25224607
15	25224707
20	25224807


### | Key Features

- Dupl multi-mode fiber optic cable
- Connector: Ceramic Ferrule
- Cable Spec: I-VH 2 x 1G
- Core diameter: 50/125µm
- Low Smoke Zero Halogen (LSZH/LSOH)
- Cable jacket color: Aqua
- Each cable includes a measure protocol

### | Package Contents


- 1 x ST/ST Fiber Optic Patch Cable, OM3

# DUPLEX FIBER OPTIC CABLE ST/PC-ST/PC 50/125 OM3 LSZH

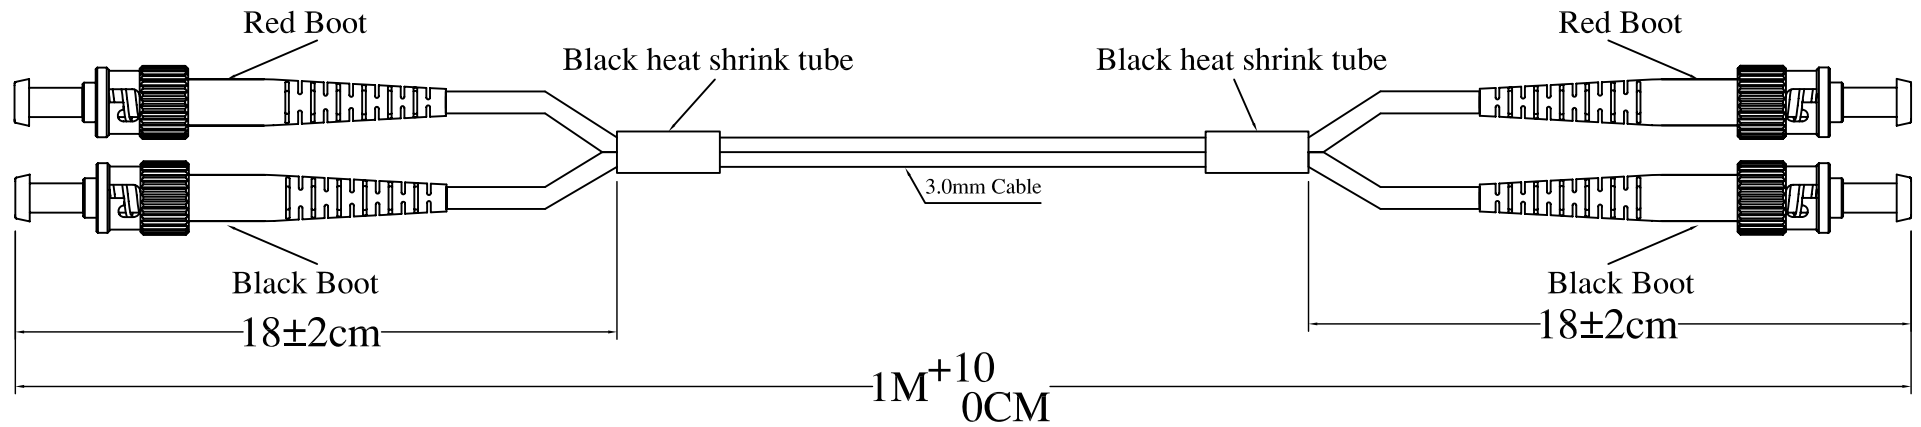

## Specifications:

Fiber Mode	MM
Type	ST/PC-ST/PC
Cable Diameter (mm)	Φ 3.0
Cable Color	Aqua
Core Diameter (um)	50/125
Insertion Loss (dB)	≤ 0.25
Return Loss (dB)	≥ 35
Operating Temperature (°C)	-40~+75
Storage Temperature (°C)	-40~+85

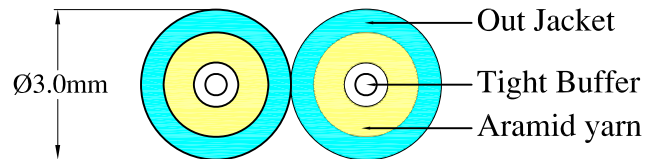

UNIT	mm	PAGE	1/1	MODEL	ST/PC-ST/PC
SCALE	--	DRAW		DRAW NO.	
MAT.		CHECK		NAME	ST-ST-Patchcords
DATE	10-Feb-15	APPR.		MAT_NO.	

VIEW

equip