










SCALE 1/4



RJ45 RIGHT ANGLE JACK



IDC(CKR) Cröse Krone

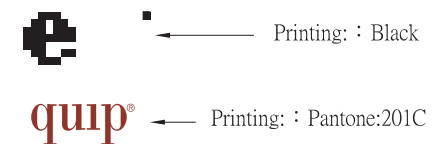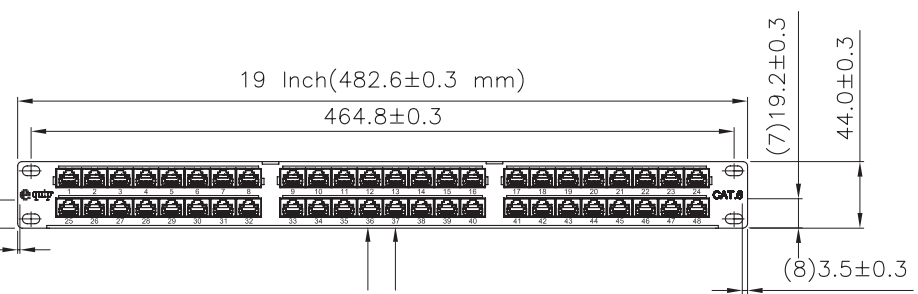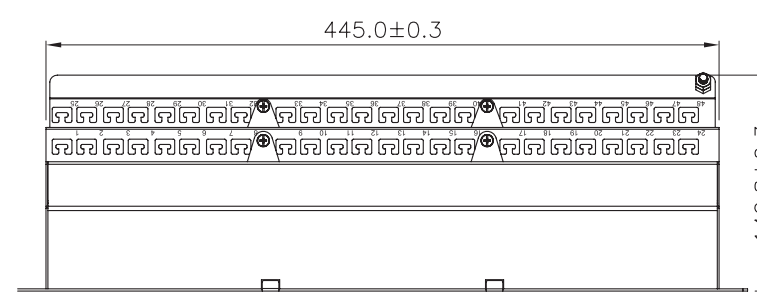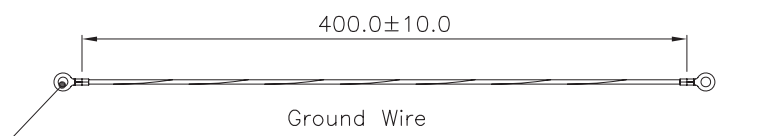

Specification :

- Material :
1. Base Case : SECC, 1.5 mm thickness with Black/Gray color painted.
  2. RJ45 Jack Housing : PBT+15%, UL 94V-0.
  3. RJ45 Shield : Phosphor Bronze with Nickel plated.
  4. RJ45 Jack Contact Material & Finished :
    - 4-1. Phosphor Bronze with 50-60 micro-inch Nickel plated.
    - 4-2. Contact area: Min. 3 mm 50 micro-inch Gold plated.
  5. IDC Housing : PC+5%, UL 94V-2.
  6. IDC Terminal material & finished :
    - 6-1. Phosphor Bronze with 50-60 micro-inch Tin plated.
    - 6-2. Krone tool only.
    - 6-3. Suitable for 22-26 AWG stranded and solid wire.
  7. Ground Wire : 18 AWG Wire, with Green/Yellow striped color, length 40 cm.

Performance :

- a. The sticker color codes combine two wirings of T568A & T568B.
- b. Insertion Force : 900 gms for 8 contacts.
- c. Retention Strength : 7.7 kgs between Jack and Plug.
- d. Operation Temperature : -40°C to 80°C.
- e. Durability :
  - e-1. Jack : 750 cycles Plug-Jack mating and unmating test, insertion cycles at 20 cycles/minute max. Contact resistance test per 100 cycles.
  - e-2. IDC : Max. 200 punching times.
- f. The Cat.6 performance is in compliance with the ANSI/TIA/EIA 568 B.2-1 standard.

GENERAL TOLERANCE OF DIMENSIONS	
X.XXX	±0.005
X.XX	±0.05
X.X	±0.1

**Cat.6 patch panel 48-Port, 1U, shielded, light grey**

	SCALE 1/5 (A4)	UNIT mm	SHEET 1 OF 1	
--	----------------	---------	--------------	--