


Flex Cable Cat.5e SF/UTP 4P26

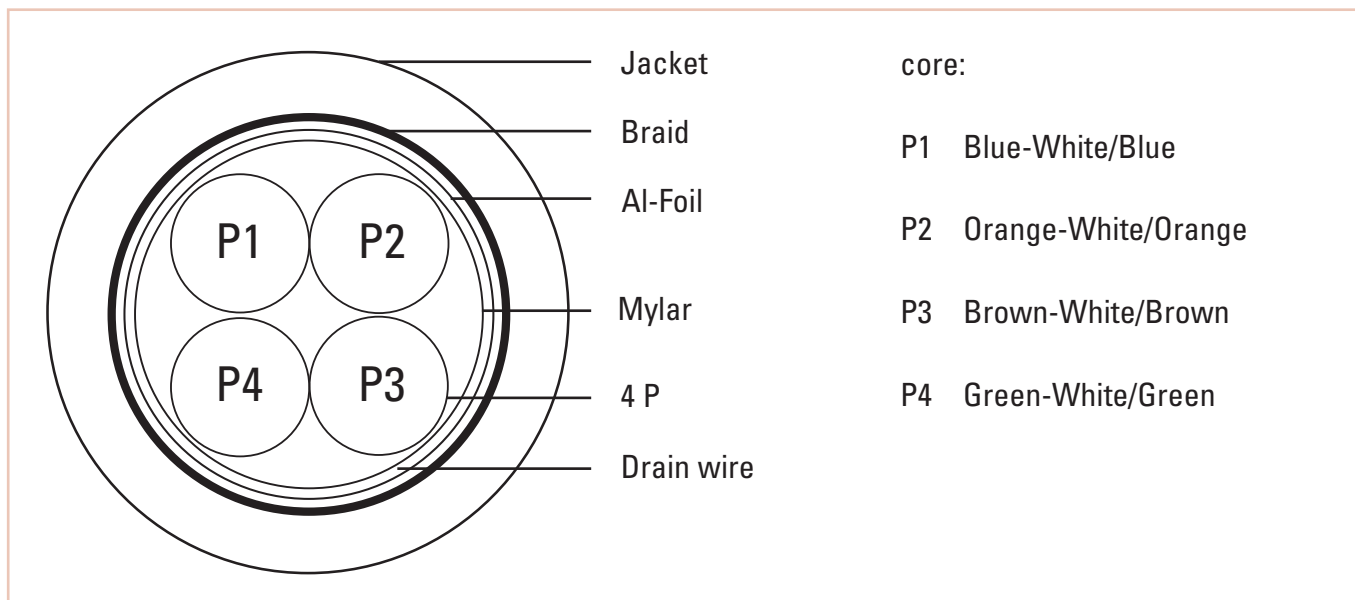

ITEM	DESCRIPTION	
No. of Cord	4 Pairs	
Conductor	Material	Cu
	Construction	26AWG ; 7 stranded / 0.16 mm
Insulation	Material	HDPE
	Nom. Thickness	0.24 mm
	Nom. Diameter	0.96±0.01 mm
Outside-Shield	Material	Mylar
	Drain wire	Copper (7 stranded / 0.16mm)
	Material	Al-Foil
Jacket (2)	Material	PVC
	Nom. Thickness	0.60 mm
	Nom. Diameter	5.7±0.2 mm

Marking:
 equip SF/UTP CAT. 5e 100MHZ ISO/IEC11801 & TIA/EIA 568B.2
 ETL VERIFIED FOR GIGABIT ETHERNET- 26AWGx4P IEC 332-1 1M

ELECTRICAL PROPERTIES	
Conductor Resistance	Max. 13 ohms/100m at 20°C
Insulation Resistance	Min. 500 mega ohms-km at 20°C
Dielectric Test	500 VAC/1 min; No Breakdown
Impedance	Nom.100±15 ohms @1MHz To 100MHz
Attenuation	≤32db/100m@100MHz