

Cat.6_A STP FLAT Patch Cord



The equip[®] Cat.6_A S/FTP Patch Cord is composed of preeminent materials and fully-examined to fulfill the 10G application. The flat form factor is ideal for saving space and thus more convenient for cabling deployment, avoiding the cumbersome installation.


| Key Feature

- 32AWG
- 600MHz
- Stranded
- PIMF (pairs in metal foil)
- Gold plated pins
- Molded boot
- Cable length printed on plug
- OD: 6.0 x 1.9mm

| Typical Applications

- IEEE 802.3: 10Base-T; 100Base-T; 1000Base-T ; 10GBASE-T
- IEEE 802.5 16 MB; ISDN; TPDDI; ATM

| Structure

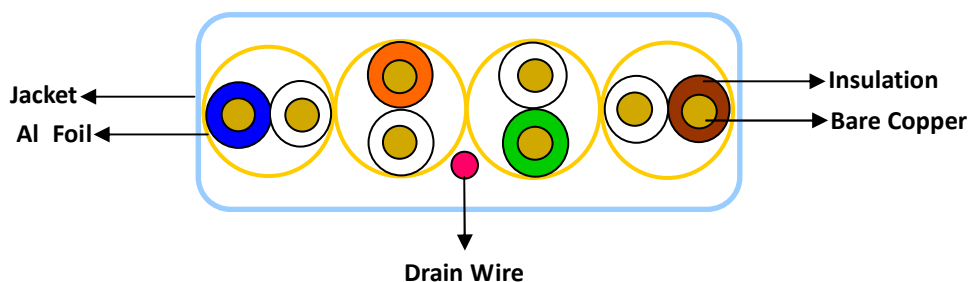

| Specification

Conductor	Material	Bare Copper
	Construction	32AWG
Insulation	Thickness	0.17 mm
	Diameter	0.55 ± 0.03mm
	Colors	Blue-White/Blue, Orange-White/Orange, Green-White/Green, Brown-White/Brown
Jacket	Material	PVC
	Thickness	0.35mm
	Diameter	(6.0 ± 0.1) x (1.9 ± 0.1) mm
	Marking	equip E889980-A STYLE 2835 60 ° C 30V VW-1 32AWG 4PR CAT.6A PATCH CABLE_ _ _STP

| Ordering Information

	white	red	green	yellow
0.5m	607817	607827	607847	607867
1m	607810	607820	607840	607860
2m	607811	607821	607841	607861
3m	607812	607822	607842	607862
5m	607814	607824	607844	607864
10m	607816	607826	607846	607866

Packing: equip zip bag