



www.equip-info.net

Cat.5e U/UTP Patch Cord




805911

The equip® Cat.5e U/UTP Patch Cord is composed of high-quality materials and thoroughly-examined to meet EIA/TIA 568-B.2 channel standard, delivering ultrahigh and error-free signal in the most demanding network environments

| Key Feature

- Stranded AWG 24 Patch Cord with 100MHz Performance.
- High performance and easy installation
- Gold Plating Pin Provides the Highest Interconnect Reliability
- Cable Length Printing on Plug

| Structure

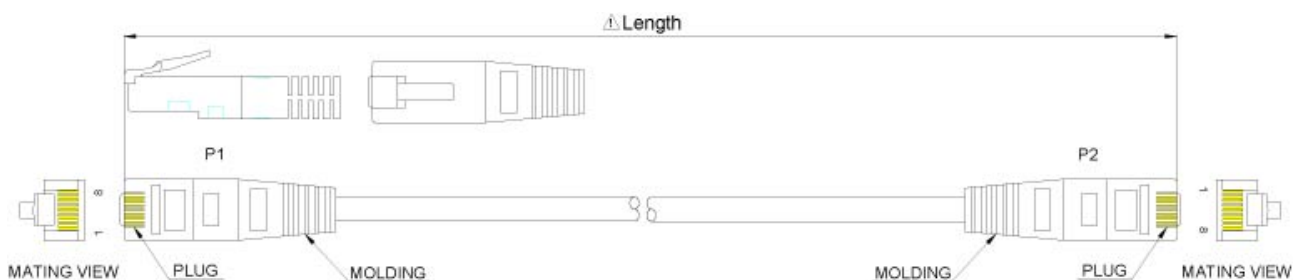

| Specification

Conductor	Material	Bare Copper
Insulation	Thickness	MIN at any point: 0.15mm MAX AVG:0.25 mm
	Diameter	0.95± 0.06mm
Jacket	Material	PVC
	Thickness	MIN at any point: 0.42mm MAX AVG: 0.48mm
	Diameter	5.4 ± 0.2mm
	Marking	equip CAT.5E U/UTP PATCH CABLE 4P 24 AWG ISO/IEC 11801 & EN 50288 & TIA/EIA-568-B.2
Connector	RJ45 Plug	8P8C, 3u"
Typical Applications		IEEE 802.3: 10Base-T; 100Base-T; 1000Base-T ; 10GBASE-T
		IEEE 802.5 16 MB; ISDN; TPDDI; ATM

| Ordering Information

Packing: Zip bag

