

www.equip-info.net

Cat.6A S/FTP Slim Patch Cord



The equip® Cat.6A F/FTP Patch Cord is composed of preeminent materials and fully-examined to comply with industrial standards. Offering higher bandwidth and better signal-to-noise margin, the Cat.6A cable is able to deliver ultrahigh and error-free performance in the most demanding network environments, especially for the 10G application.

Key Feature


- 32AWG
- 500MHz
- Stranded
- PIMF (pairs in metal foil)

- Gold plated pins
- Molded boot
- Cable length printed on plug
- Halogen free LSZH

Typical Applications

- IEEE 802.3: 10Base-T; 100Base-T; 1000Base-T; 10GBASE-T
- IEEE 802.5 16 MB; ISDN; TPDDI; ATM

Structure

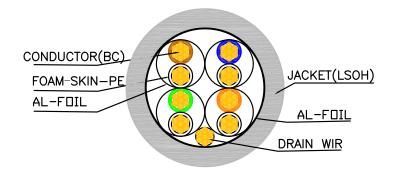



www.equip-info.net

I Specification

Conductor	Material	Bare Copper
	Construction	32AWG, 7/0.08 ± 0.005mm
Insulation	Thickness	MIN at any point: 0.18mm / MAX AVG:0.20mm
	Diameter	0.62 ± 0.05 mm
	Colors	Blue-White/Blue, Orange-White/Orange, Green-White/Green, Brown-White/Brown
Jacket	Material	LSZH
	Thickness	MIN at any point: 0.40mm / MAX AVG: 0.46mm
	Diameter	3.8 ± 0.3 mm

I Ordering Information



	Beige	Black	Blue	Red
0.25m	606112	606122	606132	606142
0.5m	606113	606123	606133	606143
1m	606114	606124	606134	606144
2m	606115	606125	606135	606145
3m	606116	606126	606136	606146
5m	606117	606127	606137	606147
7.5m	606118	606128	606138	606148
10m	606119	606129	606139	606149
15m	606120	606130	606140	606150
20m	606121	606131	606141	606151

Packing: equip zip bag

