


## Cat.5e U/UTP Patch Cord

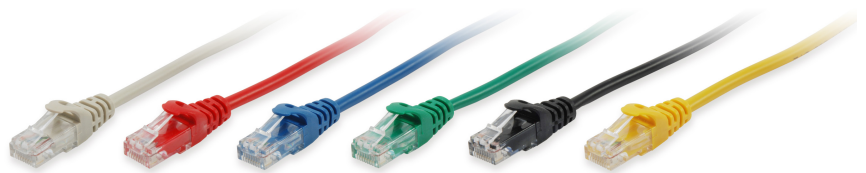


The equip<sup>®</sup> Cat.5e U/UTP Patch Cable is composed of high-quality materials and thoroughly-examined to meet ANSI/TIA-568-C.2 channel standard, delivering ultrahigh and error-free signal in the most demanding network environments.

### | Key Feature

- Stranded AWG 26 Patch Cord with 100MHz Performance.
- High performance and easy installation
- Gold Plating Pin Provides the Highest Interconnect Reliability
- Cable Length Printing on Plug

### | Structure

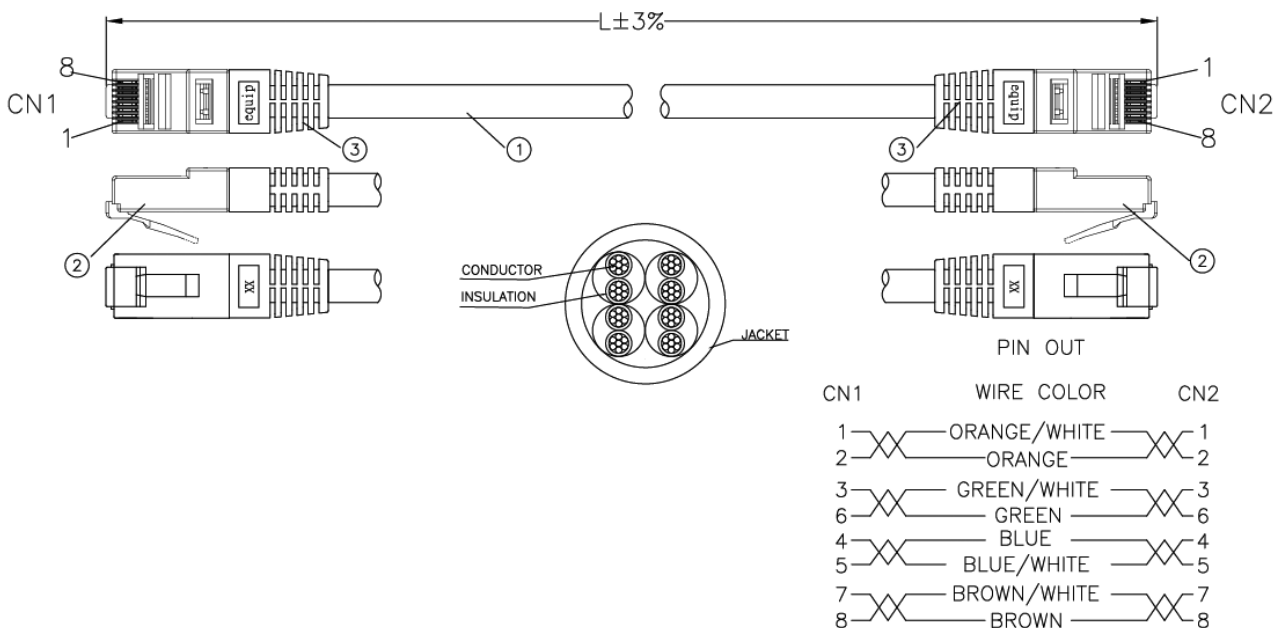

### | Specification

<b>Conductor</b>	Construction	26AWG, 7/0.16 ± 0.015mm
<b>Insulation</b>	Thickness	MIN at any point: 0.14mm MAX AVG:0.15 mm
	Diameter	0.78± 0.02mm
	Colors	Blue/White-Blue, Orange/White-Orange, Green/White-Green, Brown/White-Brown
<b>Jacket</b>	Material	PVC
	Thickness	MIN at any point: 0.45mm MAX AVG: 0.55mm
	Diameter	4.7 ± 0.3mm
	Marking	equip CAT.5E U/UTP PATCH CABLE 4PR 26AWG ISO/IEC 11801 & EN 50288 & TIA/EIA-568-C.2
<b>Connector</b>	RJ45 Plug	8P8C, 3u"
<b>Typical Applications</b>		IEEE 802.3: 10Base-T; 100Base-T; 1000Base-T ; 10GBASE-T IEEE 802.5 16 MB; ISDN; TPDDI; ATM

### | Ordering Information

	Beige	Red	Blue	Green	Black	Yellow
0.25m	825413	825423	825433	825443	825453	825463
0.5m	825417	825427	825437	825447	825457	825467
1.0m	825410	825420	825430	825440	825450	825460
2.0m	825411	825421	825431	825441	825451	825461
3.0m	825412	825422	825432	825442	825452	825462
5.0m	825414	825424	825434	825444	825454	825464
7.5m	825415	825425	825435	825445	825455	825465
10m	825416	825426	825436	825446	825456	825466
15m	825418	825428	825438	825448	825458	825468
20m	825419	825429	825439	825449	825459	825469
30m	825480					

**Packing:** equip zipper bag